


Honeywell

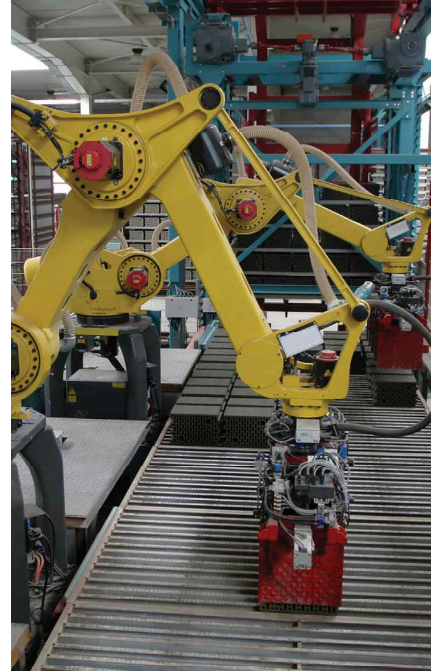

HG1120 MEMS Inertial Measurement Unit

Aerospace performance. Industrial prices.
Possibilities of Navigation. *Made Easy.*

HG1120 MEMS Inertial Measurement Unit



Proven - Dependable - Accurate

The HG1120 is a Micro-Electro-Mechanical System (MEMS) based Inertial Measurement Unit (IMU) designed to meet the needs of a range of applications across various markets including agriculture, AUVs, industrial equipment, robotics, survey/mapping, stabilized platforms, transportation, UAVs, and UGVs. With industry standard communication interfaces and a wide input voltage range the HG1120 is easily integrated into the variety of architectures that these applications present. The extremely small size, light weight, and low power make the HG1120 ideal for most applications.

The HG1120 includes MEMS gyroscopes, accelerometers, and magnetometers. In addition, the HG1120 employs an internal environmental isolation system to attenuate unwanted inputs commonly encountered in real world applications. The internal isolation and other proprietary design features ensure the HG1120 is rugged enough to meet the needs of the most demanding users.

Three different performance grades of the HG1120 are available as off-the-shelf items. The HG1120 offers configurable features, such as output data rate and control signal filtering, to simplify system integration. Honeywell screens and calibrates all of the MEMS inertial sensors utilized in the HG1120 IMU.

The HG1120 is not ITAR controlled. Its Export Control Classification Number (ECCN) is 7A994.

Find Out More

Visit us at: aerospace.honeywell.com/HG1120



Tel : 070-7010-0440
<http://wisesystem.co.kr>
 E-mail : sales@wisesystem.co.kr

Key Honeywell Advantages

- Suitable applications include precision agriculture, surveying, platform control, and motion compensation.
- World class inertial sensor development, calibration, and compensation.
- Units feature a range of user configurable options with selectable output data rates and filtering.
- RS-422 Asynchronous and SPI Interface protocols. CAN interface available upon request.
- Proven reliability, dependability, and ruggedness, through unit life.

HG1120 IMU KEY CHARACTERISTICS	
Volume / Size	1.7 in ³ (29 cm ³) / 1.850" x 1.730" x 0.557"
Weight	54 grams nominal
Power Consumption	<0.4 Watts
Operating Temperature Range	-40°C to 85°C
Data Rate	Up to 300 Hz (Guidance) and 1800 Hz (Control) – user configurable
Gyroscope Operating Range	Up to 500 deg/sec in all axes
Accelerometer Operating Range	Up to 16g in all axes
Magnetometer Operating Range	Up to 16 gauss in all axes
Supply Voltage	+3.0 to +5.5 VDC

HG1120 IMU STANDARD MODELS TYPICAL PERFORMANCE - STABLE ROOM TEMPERATURE						
Distributor Ordering PN ²	Gyro Bias Repeatability (°/hr)	Gyro Bias In-Run Stability ¹ (°/hr)	ARW (°/√hr)	Accel Bias Repeatability (mg)	Accel Bias In-run Stability ¹ (mg)	VRW (fps/√hr)
HG1120CA50	260	10	0.3	5	0.03	0.20
HG1120BA50	520	24	0.4	10	0.05	0.25
HG1120AA50	780	48	0.5	15	0.08	0.30

HG1120 IMU STANDARD MODELS AND PERFORMANCE - FULL OPERATING TEMPERATURE RANGE						
Distributor Ordering PN ²	Gyro Bias Repeatability (°/hr)	Gyro Bias In-run Stability ¹ (°/hr)	ARW (°/√hr)	Accel Bias Repeatability ¹ (mg)	Accel Bias In-run Stability ¹ (mg)	VRW (fps/√hr)
HG1120CA50	500	38	0.6	8	0.11	0.25
HG1120BA50	720	65	0.7	16	0.15	0.30
HG1120AA50	1080	120	1.3	24	0.20	0.50

¹ Allan Variance Method

² Honeywell Internal MPN's are 68901120-CA50, 68901120-BA50, 68901120-AA50