



When precision matters.®

A Tallysman Accutenna®

TW3929E Embedded Low Current Triple Band GNSS Antenna + L-band Correction Services

The TW3929E is a low current triple band GNSS antenna capable of receiving GPS L1/L2/L5, GLONASS G1/G2/G3, BeiDou B1/B2, Galileo E1/E5 plus L-band correction services coverage and is especially designed for precision triple frequency positioning. The TW3929E provides superior multipath signal rejection, a linear phase response, and tight Phase Centre Variation (PCV). This antenna is ideal for precision agriculture, autonomous vehicle tracking and guidance, and other applications where precision matters.




The TW3929E features a precision tuned, twin circular dual feed, stacked patch element. The signals from the two orthogonal feeds are combined in a hybrid combiner, amplified in a wide-band LNA, then band-split for narrow filtering in each band and further amplified prior to recombination at the output.

The antenna also has a strong pre-filter to mitigate intermodulated signal interference from LTE and other cellular bands.

The TW3929E offers excellent axial ratio and a tightly grouped phase center variation.

The TW3929E covers from 1164MHz to 1254MHz and 1525MHz to 1606MHz.

The TW3929E is also available with 35dB or 28dB gain with a part number of TW3967 and TW3972E respectively. A 100mm ground plane is recommended.

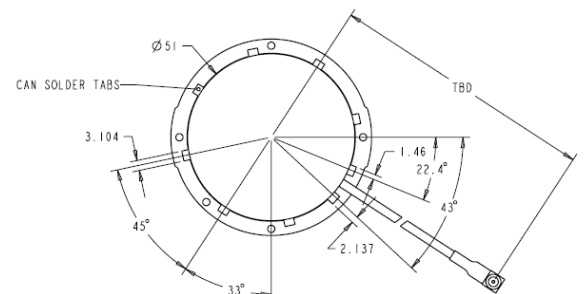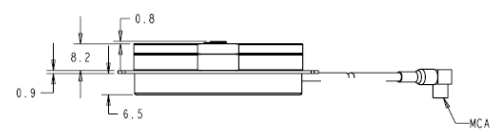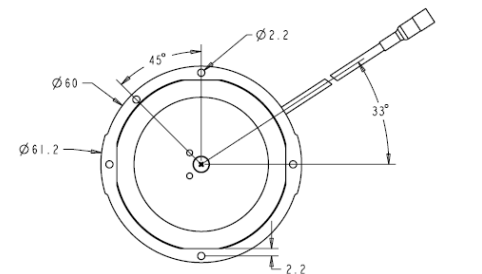

Applications

- Precision GPS position
- Triple Frequency RTK receivers
- Mission Critical GPS Timing
- Military & Security
- Network Timing and Synchronization

Features

- Very low Noise Preamp, 2.5dB typ.
- Axial ratio: <2dB typ.
- Tight Phase Center Variation
- LNA Gain 26dB typ.
- Low current: 12 mA typ.
- ESD circuit protection: 15 KV
- Invariant performance from: +2.5 to 16VDC

Benefits

- Ideal for triple band RTK surveying systems
- Great multipath rejection
- Increased system accuracy
- Great signal to noise ratio
- REACH and RoHS compliant



When precision matters[®]

TW3929E Embedded Low Current Triple Band GNSS Antenna + L-band Correction Services

Specifications (Measured a Vcc = 3V, and Temperature=25°C)

Antenna

E5a/L5 Gain (100mm ground plane)			-1.5dBic typ. at Zenith
B2/E5b/G3 Gain (100mm ground plane)			2.5 dBic typ. at Zenith
L2 Gain (100mm ground plane)			4.0 dBic typ. at Zenith
G2 Gain (100mm ground plane)			2.5 dBic typ. at Zenith
E1 Gain (100mm ground plane)			4.0 dBic typ. at Zenith
L1 Gain (100mm ground plane)			4.0 dBic typ. at Zenith
G1 Gain (100mm ground plane)			2.5 dBic typ. at Zenith
Axial Ratio @ zenith			
L5/E5ab	<1.5dB	B2	<1.5dB
L2	<1dB	G2	<1.5dB
L-Band	<1dB		
L1/E1	<1dB	G1	<1.5dB

Electrical

Filter Bandwidth		L2/L5: 1164MHz-1254MHz	L-Band/L1: 1525 MHz-1606MHz
Overall LNA Gain		26dB min	
Gain Variation with Temperature.		3dB max over operational temperature range	
LNA Noise Figure		2.5dB typ at 25°C	
VSWR (at LNA output)		<1.5:1 typ 1.8:1 max.	
Supply Voltage Range		+2.5 to 16VDC nominal, up to 50mV p-p ripple	
EMI Immunity		50V/Meter, excepting L1 +/-100MHz and L2 +/- 100MHz	
Supply Current		12 mA typ. at 25°C, XX mA max at 75°C.	
ESD Circuit protection		15 KV air discharge.	
Out-of-Band Rejection	L5/E5/L2/G2	L1/E1/B1/G1	
	<1050 MHz	>45 dB	<1450 MHz >30dB
	<1125 MHz	>30 dB	>1690 MHz > 30dB
	>1350 MHz	>45 dB	>1730 MHz > 40dB

Mechanicals & Environmental

Mechanical Size, Ground Plane	60mm x 14.9mm (see drawing on other page), 100mm ground plane recommended
Operating Temperature Range	-40°C to +85°C
Weight	70 g (excludes cable)
Environmental	RoHS and REACH compliant
Shock	Vertical axis: 50 G, other axes: 30 G
Vibration	3 axis, sweep = 15 min, 10 to 200 Hz sweep: 3 G

Ordering Information

TW3929E – Low Current Triple Band GNSS antenna with L-Band Correction(28dB) 33-3929E-xx-yy-zzzz
 Where xx = connector type, yy = shape and colour of radome and zzzz = cable length in mm (where applicable)

Please refer to the Ordering Guide (<http://www.tallysman.com/index.php/gnss/ordering-guide/>) for the current and complete list of available radomes and connectors.



An ISO 9001:2015
 Certified Company

36 Steacie Drive Ottawa ON K2K 2A9 Canada
 Tel 613 591 3131 Fax 613 591 3121

sales@tallysman.com

The information provided herein is intended as a guide only and is subject to change without notice. This document is not to be regarded as a guarantee of performance. Tallysman Wireless Inc. hereby disclaims any or all warranties and liabilities of any kind. © 2018 Tallysman Wireless Inc. All rights reserved. V1.0